

Replacing curly wire, TS700A / TS1000A


- a. Move the lift to top position



- b. Remove cover plates



c. Remove motor lid

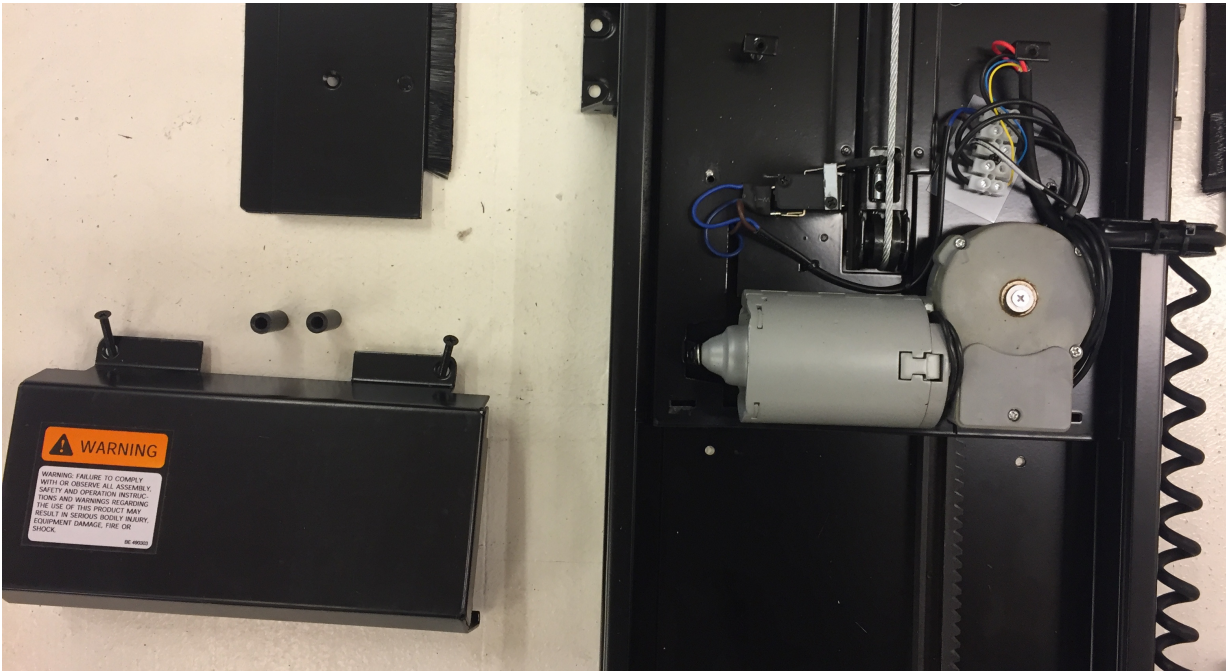

d. Cut binding string, loosen screws in terminal block and remove the defect curly wire

e. Mount the new curly wire and assembly again

